

Notes:

1. Cross Section: 24 AWG (0.25mm²)
2. Maximum Electric Current: 7AMP
3. Maximum Electric Rating: 105°C
4. Voltage Rating: 2000V
5. Terminal Material: Copper
6. Terminal Surface Treatment: Tin Plating

Standard (Metric)

L1: 0.24" (6.0mm)
D: 0.04" (1.1mm)
D1: 0.03" (0.8mm)
D2: 0.05" (1.5mm)

Tolerances

(Unless Otherwise Specified)

CATEGORY

Non Insulated Wire Ferrules

SCALE

1-1

PART

N02506

MATERIAL


Tin-Plated Copper

PAGE

10F2



FerrulesDirect

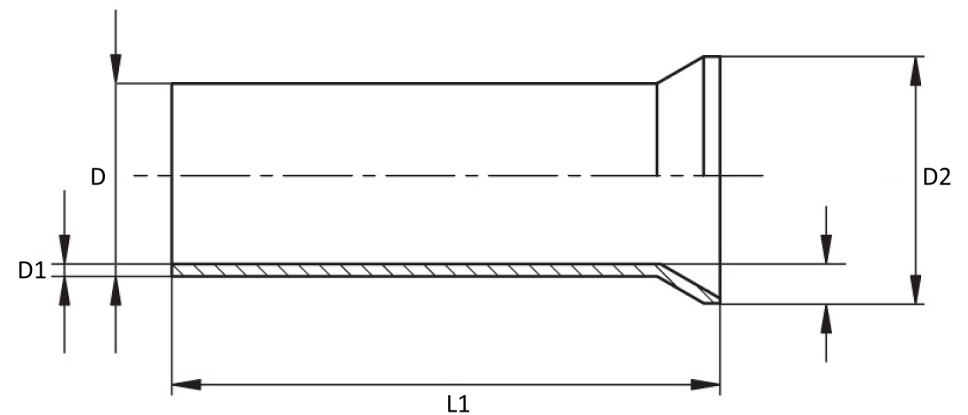

For applicable tools, visit our website: www.FerrulesDirect.com