

TECHNICAL DRAWING - N100012

Notes:

1. Cross Section: 10.00mm² (8AWG)
2. Maximum Electric Current: 70AMP
3. Maximum Electric Rating: 105°C
4. Voltage Rating: 2000V
5. Terminal Material: Copper
6. Terminal Surface Treatment: Tin Plating
7. Tensile Force: 90N


Standard (Metric)

L1: 0.472" (12.0mm)
D: 0.181" (4.6mm)
d1: 0.177" (4.5mm)
d2: 0.228" (5.8mm)
S: 0.008" (0.2mm)

Tolerances

(Unless Otherwise Specified)

L1: ±0.4
D: +0.3
d1: +0.3
d2: -0.2
S: ±0.05

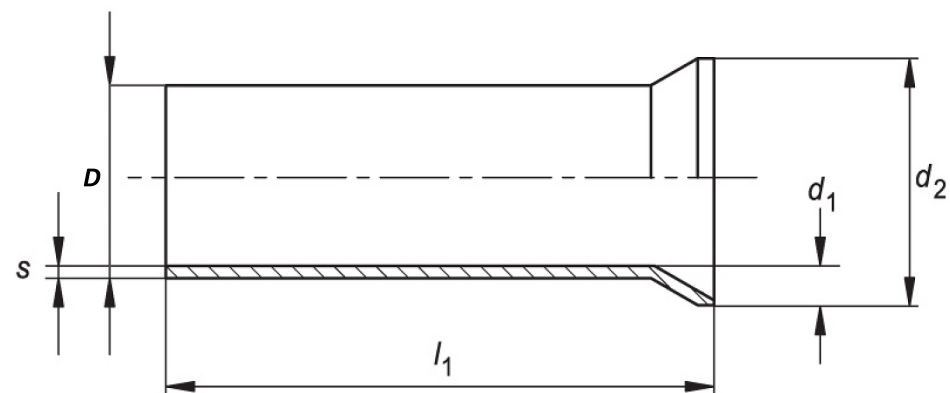

CATEGORY

Non Insulated Wire Ferrules

SHEET

1-1

PART

N100012

MATERIAL

Tin-Plated Copper



FerrulesDirect

For applicable tools, visit our website:
www.FerrulesDirect.com